

## AHT626 Dual Channel RTD Trip Amplifier

- Suitable for 2 or 3 wire resistance temperature sensor
- Supply voltage 21 to 30Vdc
- Amelec standard 10 year guarantee
- Suitable for SIL Level 1, 2, & 3 (IEC 61508-2)

### TECHNICAL SPECIFICATIONS PER CHANNEL

#### FUNCTION

High Trip: Relay de-energise on rising temperature.

Low Trip: Relay de-energise on falling temperature.

#### INPUT

Any 2, 3 wire resistance temperature sensor.  
Lead resistance compensation as standard.

Typical input: 0 – 200 Deg °C / PT100 3 wire RTD

#### OUTPUT

The Trip output is a pair of changeover contacts DPCO, rated at 250VAC, 3A, 100VA (resistive).

#### CONTROLS

Zero / Span: 15 turn potentiometers, only fitted when used with common display.

Set point: 15 turn potentiometer to set Trip point within set input range.

#### INDICATOR

Amber Led: power ON indicator  
Red Led: Relay status indicator


#### PERFORMANCE

Trip repeatability: <  $\pm 0.1\%$   
Response time: Typically < 400ms  
Trip settability: <  $\pm 0.1\%$


#### PROTECTION

Isolation 1000V RMS\*.  
Input/Contacts/Supply/Earth  
\*500VDC if RFI option (K) is specified.  
Internal Fuse.  
Fail safe on loss of power  
Input over range typically at 300%.


#### TERMINATION PER CHANNEL

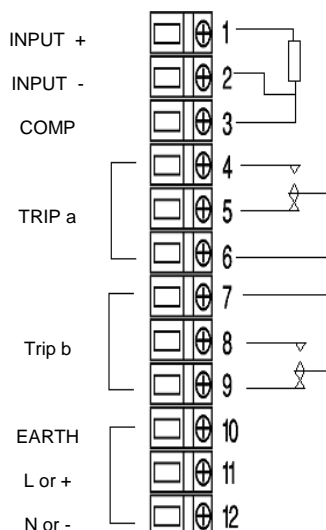

#### FRONT VIEW

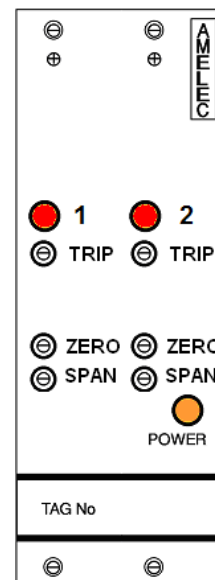

#### FUNCTION BLOCK DIAGRAM

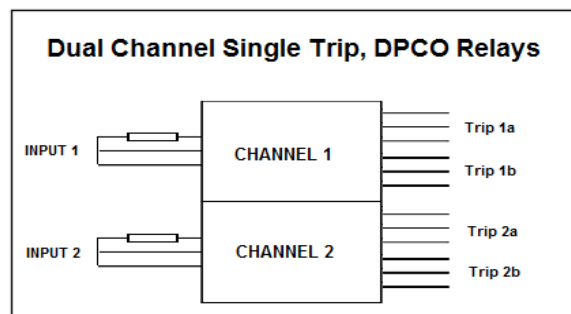

#### ENVIROMENTAL CONDITION

Storage temperature: - 40 to +70 °C  
Operating Ambient: -15 to +55 °C  
Relative Humidity: 5 to 95% RH

#### MOUNTING / DIMENSION

Card 3U high 8E wide  
Mounting 19" rack / 84E wide (See rack GA for details)  
Card weight < 200g  
(Customised / Cut down racks available)

#### ADD ON / OPTIONS

DI: Common LCD display for local monitoring  
P: Test point (Trip set point monitoring)  
K: RFI protection to IEC801-3  
Non standard Power supply ranges available