

ADG124 Optocoupler Terminal Block

- Suitable for use in SIL1, SIL2 and SIL3 rated Safety Instrumented System (SIS) Loop applications (EN 61508-2)
- Non-Smart / Non-uProcessor based, Type A instrument
- Compact Design - 10mm along the length of the rail. 69mm depth from the rail
- 5 Year Warranty
- Suitable for TS32 G-Rail and TS35 Top-Hat DIN Rail Mounting

Technical Specification

Input

Nominal 24V pulse
Min 10V / Max 30V
Loading effect 30 μ A @ 24Vdc
Amplitude range 5V to 30V
Frequency 0 ~ 1000 Hz

Other input range & types available on request

Output

Nominal 24V pulse, repeat of input
24V Pulse at up to 6mA Drive.

Other output range & types available on request

Supply

24Vdc $\pm$ 10% (RED LED Power ON indicator)

General Specification

Wiring:	26 to 12 AWG
Terminal Screw torque:	2,5mm ³ / 0.3Nm Max Torque
Isolation:	1000V RMS Input/Output/Supply
Amplitude Accuracy:	< $\pm$ 3% of full scale
Input O/C response:	Downscale drive
Response Time:	<1mS
Power Consumption:	0.75Watts
Weight:	34g


Environmental Conditions

Operating Ambient:	-10 to +70°C
IP rating:	IP20
Relative Humidity:	5 to 95% RH (Non-Condensing)
EMC:	2014/30/EU, EN 61326-1:2013 (Controlled EM)

Dimensions

Dimension (mm): 10w x 88.5h x 69d

Dummy units available if planning for future expansion

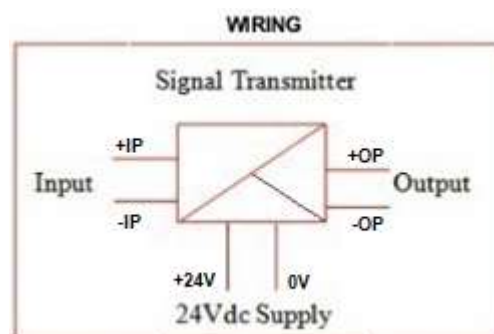

Tel: 01908-567003 Email: sales@amelec-uk.com Visit: www.amelec-uk.com Fax: 01908-566735

AMELEC Instruments, Cochran Close, Crownhill, Milton Keynes, MK8 0AJ