

## ADM232XDI (BI)(M)(V)(K)(L)(X) Trip Transmitter with Display

- Suitable for use as element in SIL 1, SIL 2 & SIL 3 rated (EN 61508-2) safety instrumented system (SIS) loop applications.
- Non-Smart/ Non-uProcessor based instrument (Type A)
- Supply voltage options:
 

115Vac	±20%
240Vac	±20%
24Vdc	±10%
48Vdc	±10%
- RFI Protection to EN 61000-4-3:2006/A2:2010 option 'K' available
- AMELEC Standard 10 year warranty

### Technical Specifications

#### Input

Any current or voltage (DC) signal that can be terminated in a PI network to produce a 400mV span

#### Analogue Output

Any standard process current or voltage signal. Current source up to 20mA, Drive voltage 11Vdc. Current sink up to 20mA, 30Vdc max External drive. Voltage source up to 10Vdc, max current 20mA

#### Trip Output

A set of single pole changeover contacts, rated at 250VAC, 3A, 100VA (resistive). Latching relay option 'L' available with Local or Remote Reset. Red LED indication of Relay status, ON Energised/ Extinguished in Trip De-energised state as standard. (Red/Green BI-colour LED optional)

Display of the Process Input on the front fascia 3½ digit LCD standard, with up to 4½ digit Red LED Display option also available.

Read button or Toggle switch shows the trip set point on the display.

#### Performance

Accuracy/Linearity: ±0.1%  
 Trip settability: ±0.1%  
 Trip repeatability: ±0.1%  
 Isolation: 1000V RMS\* Input/Output/Contacts/Supply/Earth  
 \*(500Vdc when 'K' option specified)  
 Deadband: 1% standard ('V' option adjustable 1-20% span available)  
 Response time: <100mS as standard  
 Supply consumption: 3VA  
 EMC: 2014/30/EU; EN 61326-1:2013 (Controlled EM)  
 Input O/C response: Downscale drive as standard  
 Fail Safe Relay: De-energise on Trip & Loss of Power as standard



#### Environmental Conditions

Storage Temperature: -40 to +70°C  
 Operating Ambient: -15 to +55°C  
 Relative Humidity: 5 – 95% RH (Non-Condensing)  
 EMC: 2014/30/EU, EN 61326-1:2013 (Controlled EM)  
 ('K' option RF Immunity: 20MHz-3GHz/5.25GHz ≤10V/m,  
 (80MHz-1GHz/5.6GHz ≤30V/m, 889MHz-1.75GHz ≤40V/m)

#### Additional Options available

- 'X' = Input O/C response Upscale drive
- 'M' = 24Vdc @22mA 2-wire Input loop Excitation
- 'K' = EMC/RFI protection to highest levels (Generic Industrial)

### WIRING

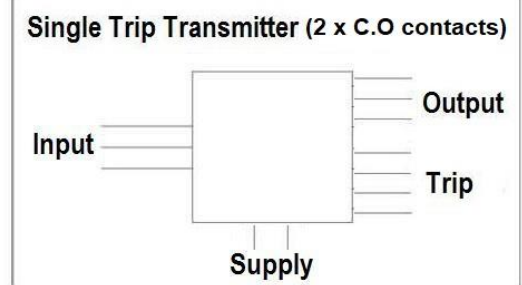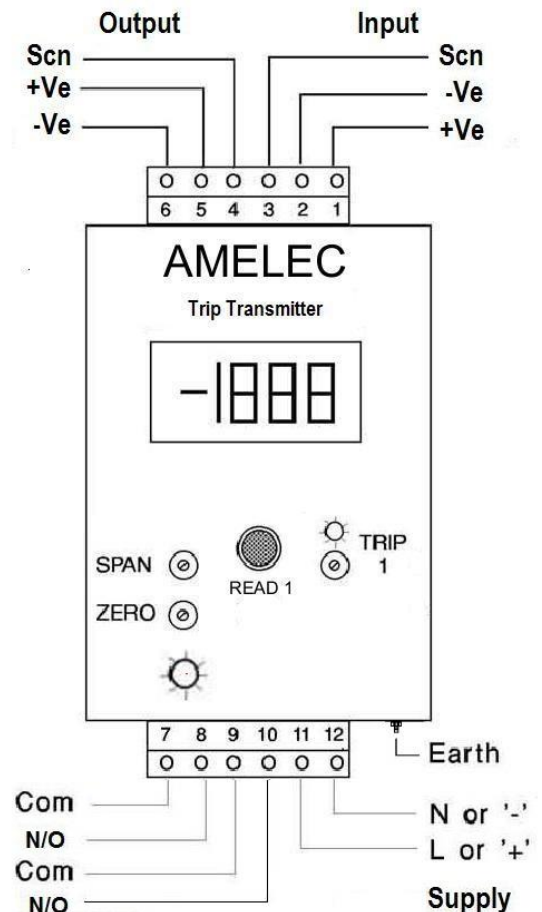

#### Mounting/Dimensions

DIN Rail (TS35) as standard  
 Enclosure Dims: 50w x 75h x 145d mm.  
 ('K' option enclosure = 182d mm)

Surface by seismic keyhole plate (50w x 130h mm)  
 & front of panel mounting options also available

Customer connections via screw terminal blocks  
 towards rear of enclosure (Fixed or plug-in optional)

Tel: 01908-567003 Email: [sales@amelec-uk.com](mailto:sales@amelec-uk.com) Visit: [www.amelec-uk.com](http://www.amelec-uk.com) Fax: 01908-566735

**AMELEC Instruments, Cochran Close, Crownhill, Milton Keynes, MK8 0AJ**