

ADM272KX Strain Gauge Trip Transmitter / Isolator

- Suitable for SIL 1, SIL 2 & SIL 3 (IEC61508) safety system loop applications.
- Isolated Excitation Supply
- Supply voltage options: 24Vdc $\pm 10\%$
48Vdc $\pm 10\%$
115Vac $\pm 20\%$
230Vac $\pm 20\%$
- RFI Protection to IEC61000-4-3:2006/A2:2010
- Amelec standard 10 year warranty

APPLICATION

- Weighing systems for tanks, hoppers and silos
- Crane protection & control systems
- Pressure sensor utilising strain gauges
- Float level meter utilising strain gauges
- Load cells utilising strain gauges

TECHNICAL SPECIFICATION

FUNCTION

Provides an under or over load Trip/Alarm & DC output signal proportional to a bridge type strain gauge utilised in load cells and pressure transducers.

INPUT

Any mV range, up to 400mV (Minimum span 4mV)
Excitation 5V to 10V at up to 30mA.

OUTPUT

DC current or voltage specified in the range of:
Current up to 100mA max in Sink configuration (externally powered)
Current up to 22mA max Source configuration (Internally powered)
Voltage any from 0.4 to 20V max @ up to 20mA.
Typical output range: 4 - 20mA (Source port, max load 550 Ω)
Single Trip set point with 2 x N.O or N.C (TBA) Relay Contacts,
Rated 250V, 2A, 100VA (resistive)

CONTROLS

Trip Set Point / Zero / Span: 15 turn potentiometers.

INDICATOR

Relay Status: Energised, LED ON, Red.
Power: ON, LED, Amber.

PERFORMANCE

Accuracy / Linearity: $< \pm 0.1\%$
Response time: Typically $< 200\text{ms}$
Deadband: 1% std (other fixed or variable hysteresis ranges optional)


PROTECTION

Input O/C drive response: Upscale drive (Downscale may be specified)
Isolation: 500Vdc. Input/Output/Excitation/Contacts/Supply/Earth
Internal Fuse.
Input over range up to typically 300%.
RF Immunity: 20MHz-3GHz/5.25GHz $\leq 10\text{V/m}$,
(80MHz-1GHz/5.6GHz $\leq 30\text{V/m}$, 889MHz-1.75GHz $\leq 40\text{V/m}$)


TERMINATION

INPUT +	1
IINPUT -	2
EXC +	3
EXC -	4
O/P+	5
O/P -	6
N/O (a)	7
Comm (a)	8
N/O (b)	9
Comm (b)	10
Live / +	11
Neutral / -	12

FRONT VIEW

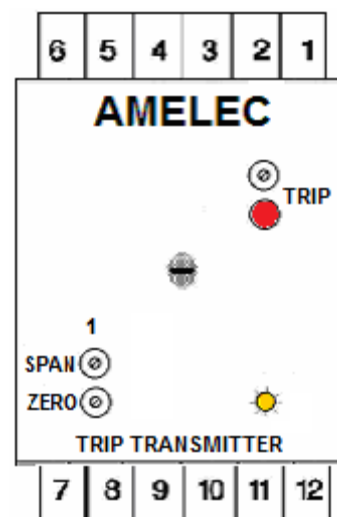

FUNCTION BLOCK DIAGRAM

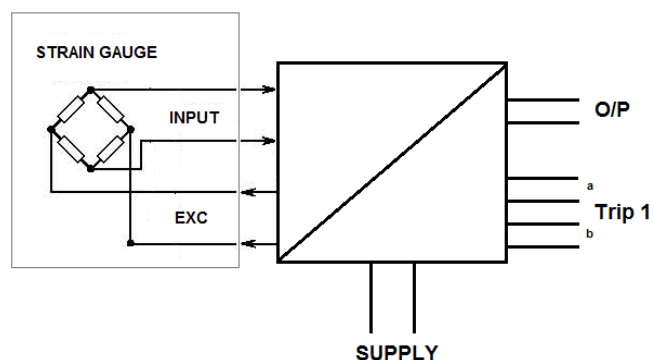

ENVIROMENTAL CONDITION

Storage temperature: - 40 to +70 °C
Operating Ambient: -15 to +55 °C
Relative Humidity: 5 to 95% RH

MOUNTING / DIMENSION

Enclosure: 50w x 75h x 182d mm
Mounting: Din rail (TS35) or Surface by seismic Keyhole plate
(Surface mounting plate Dims: 50w x 130h mm)
Weight $< 500\text{g}$

ADD ON / OPTIONS

DI: LCD display for local monitoring
P: Test point (Output or trip set point monitoring)
Non standard Power supply ranges available