

## ADT152DIP AC Voltage/Current Dual Trip Amplifier

- Suitable for SIL 1, 2 or 3 applications
- Suitable for combinations of AC Current Inputs
- Supply voltages: 115Vac  $\pm 20\%$   
240Vac  $\pm 20\%$   
24Vdc  $\pm 2.5V$   
48Vdc  $\pm 5V$
- RFI Protection to IEC61000-4-3 available
- AMELEC Standard 10 year warranty

### Technical Specifications

#### Input

Standard 0-150 or 0-300Vac  
0 - 1 Amps or 0 - 5 Amps AC  
Intermediate ranges available at no extra cost

#### Output

2 x SPCO Relay contacts,  
rated at 250VAC, 2A, 100VA (resistive)

#### Isolation

1000V RMS\* Input/Output(s)/Supply/Earth  
\*(500Vdc if RFI option 'K' is specified)

#### Performance

Trip settability:  $\pm 1\%$   
Trip repeatability:  $\pm 0.1\%$

#### Response time



<400mS for the breaking of a step change  
normally closed contact sets.  
(for a 10 to 90% with trip set at 50%)

#### Environmental Conditions

Storage Temperature: -40 to 70°C  
Operating Ambient: -15 to 55°C  
Relative Humidity: 5 – 95% RH

#### Mounting/Dimensions

50w x 75h x 110d (mm)

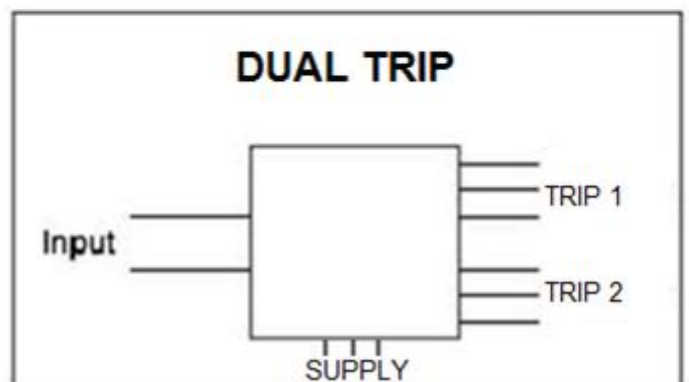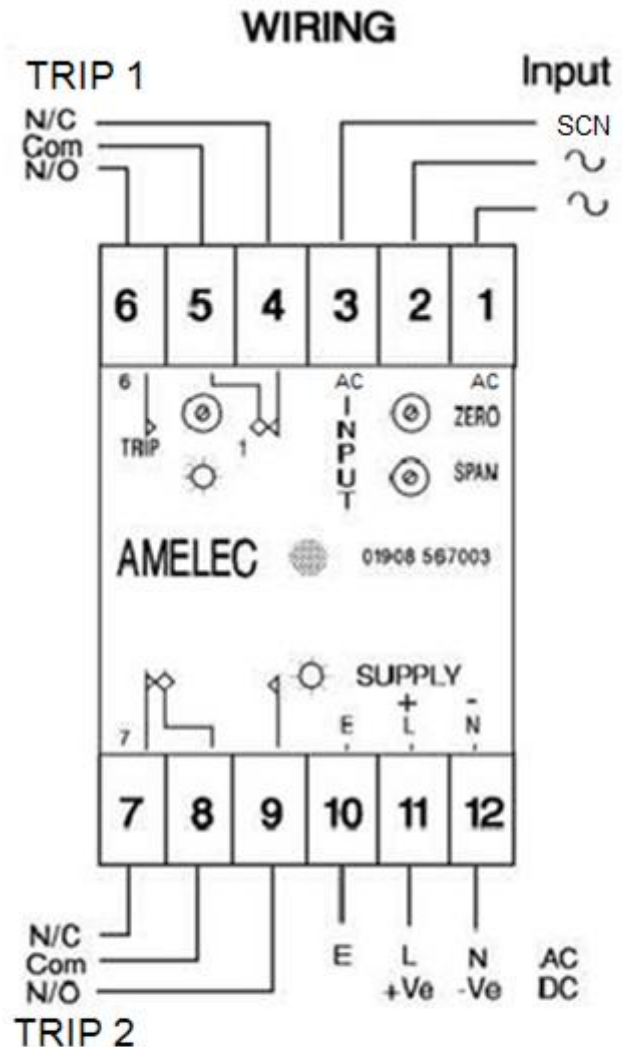

Tel: 01908-567003 Email: [sales@amelec-uk.com](mailto:sales@amelec-uk.com) Visit: [www.amelec-uk.com](http://www.amelec-uk.com) Fax: 01908-566735

**AMELEC Instruments, Cochran Close, Crownhill, Milton Keynes, MK8 0AJ**