

AHM780-P-RIS Frequency to Process Transmitter

- Suitable for frequency inputs and process outputs
- Supply voltage 21 to 30Vdc
- Amelec standard 10 year guarantee
- Suitable for SIL Level 1, 2, & 3 (IEC 61508-2)
- RIS SC8350 Series Replacement Card

TECHNICAL SPECIFICATION

FUNCTION

Frequency input to process output signal Converter/Isolator.

INPUT

Option of sine, square or sawtooth wave form. Minimum 25Hz, maximum 10KHz

OUTPUT

DC current or voltage specified in the range of:
Current up to 100mA max in Sink configuration (externally powered)
Current up to 22mA max Source configuration (Internally powered)
Voltage any from 0.4 to 20V max @ up to 20mA.
Typical output range: 4 - 20mA (Source)

CONTROLS

Zero / Span: 15 turn potentiometers to calibrate Output.

SUPPLY VOLTAGE

Nom 24Vdc Buss line within RIS Rack Backplane.

TEST POINTS

I/P & O/P Test Points on Front Fascia allows for simulation of the input & monitoring of the output signal (supplied with Test Plugs on flying leads)

INDICATOR

Amber Led: power ON indicator


PERFORMANCE

Response time: Typically < 400mS
Linearity : $\pm 0.1\%$


PROTECTION

Isolation 1000V RMS*. Input/Output/Supply
Internal Fuse.
Input over range typically at 300%.
Output saturation 125%


Internal 24Vdc SUPPLY BUSS




RIS Back Plate TERMINATION

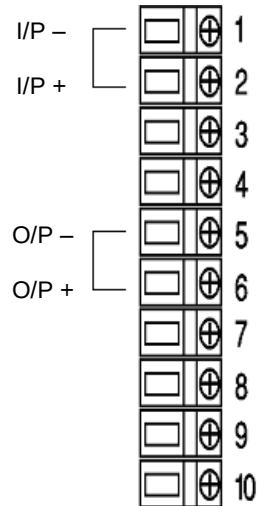

FRONT VIEW

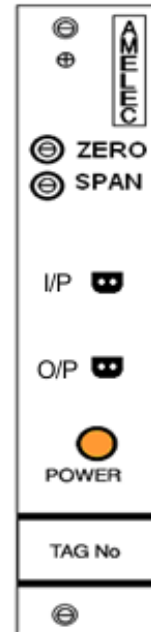

FUNCTION BLOCK DIAGRAM

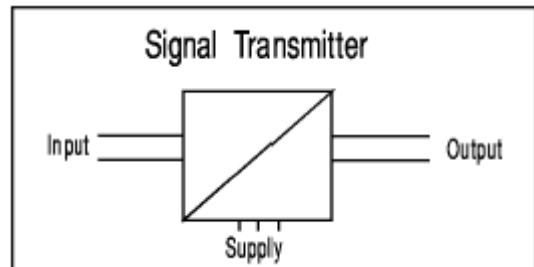

ENVIROMENTAL CONDITION

Storage temperature: - 40 to +70 °C
Operating Ambient: -15 to +55 °C
Relative Humidity: 5 to 95% RH

MOUNTING / DIMENSION

Card 3U high 4E wide
Mounting 19" rack / 84E wide (See rack GA for details)
Card weight < 200g

ADD ON / OPTIONS

DI: Common LCD display for local monitoring
J : Input injection jack socket
P: Test point