

APM489-4 Digital Count up Timer

- 4 Digit RED LED high-brightness display.
- Microprocessor based Technology
- 24Vdc Power Supply as standard ($\pm 10\%$)
(48Vdc supply option available)
- High stability & low cost

Technical Specifications

Input

Contact Closure to illuminate the display digits & commence the countdown.

(Display remains blank in between timer events (.))

Time periods of up to **60.00** minutes available, to be specified at time of orders

Display

4 x 20mm Red LED Digit high brightness display
Counts down in seconds / minutes to **00.00**

Reset

Same Contact Opens at any time to instantly Reset /
Blank the display digits (.) & await next Closure

Environmental Conditions

Storage Temperature: -20°C to +70°C
Operating Ambient: -10°C to +60°C
Relative Humidity: 5% – 95% RH
IP Rating: IP50 front of panel as std


IP66 option: Front watertight clear rubber cover

Dimensions


Front Bezel: 96w x 48h mm
Enclosure Depth: 110d mm (Inc. terminals)
Panel cut-out: 93w x 45h mm



■ DIMENSIONS

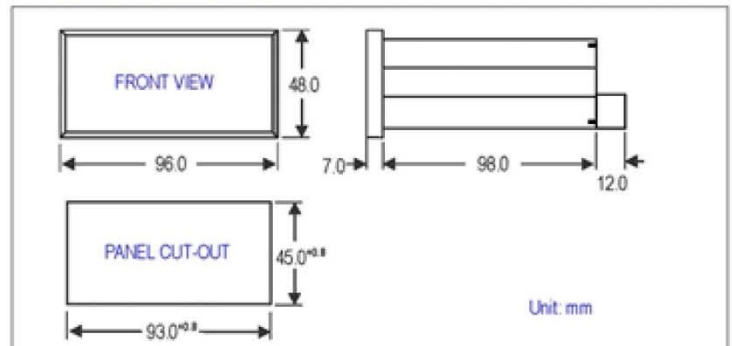

■ CONNECTION DIAGRAM

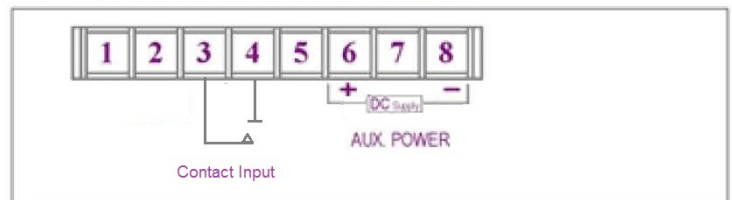

Tel: 01908-567003 Email: sales@amelec-uk.com Visit: www.amelec-uk.com Fax: 01908-566735

AMELEC Instruments, Cochran Close, Crownhill, Milton Keynes, MK8 0AJ