

AST111 Thermocouple Trip Amplifier

- Suitable for SIL 1, 2 & 3 applications
- Suitable for any BS4937 Thermocouple
- Supply voltages: 24Vdc $\pm 2.5V$
48Vdc $\pm 5V$
- AMELEC Standard 10 year warranty

Technical Specifications

Input

Any signal developed from a thermocouple greater than 4mV

Output

The trip output is a pair of changeover contacts, rated at 250VAC, 2A, 100VA (resistive)

Isolation

1000V RMS Input/Output(s)/Supply/Earth
Open circuit response may be specified as Upscale or Downscale

Performance


Trip settability: $\pm 1\%$
Trip repeatability: $\pm 0.1\%$
Response time: $< 400\text{ms}$

Environmental Conditions

Storage Temperature: -40 to 70°C
Operating Ambient: -15 to 55°C
Relative Humidity: 5 – 95% RH

Dimensions


22.5w x 75h x 110d (mm)

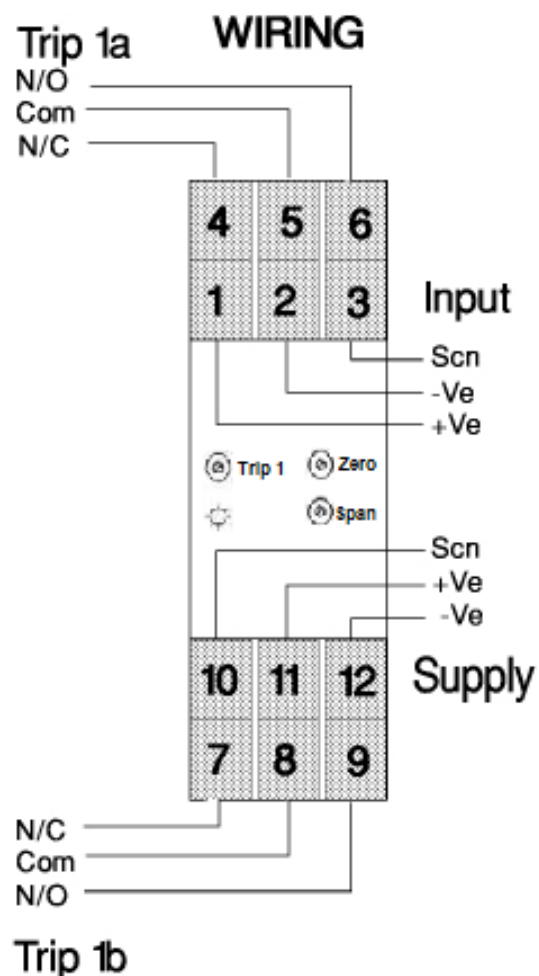

Trip mode jumper position

SW1

HIGH		Normally Energised
LOW		Normally Energised

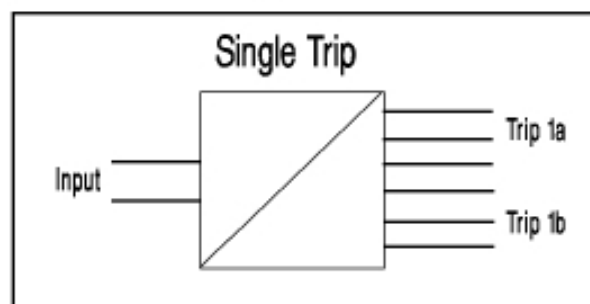

Tel: 01908-567003 Email: sales@amelec-uk.com Visit: www.amelec-uk.com Fax: 01908-566735

AMELEC Instruments, Cochran Close, Crownhill, Milton Keynes, MK8 0AJ