

ACT05X-2 AC Current Signal Splitter

- Low Cost
- Performance to BS3938 - IEC185
- Accuracy Class 1 Standard
- 1A or 5A Secondaries
- Grey Steel enclosure with side Earth stud

Description

The Amelec ACT Range of Current Transformers offer a comprehensive specification, extensive range with high reliability & accuracy at an economical price. All transformers are to Accuracy Class 1.

Technical Specifications

Input

0 - 5A AC

Output

2 x Repeat of Input current, 0 - 5A ac

Termination

6 Way Gold Terminal screw block on front
(7.5mm screw terminals)

Screw Terminal Connections


No. of contact: 6
Contact width: 7.5mm
Contact distance: 9.2mm
Screw terminal block dimensions: 78 x 19 x 16.5mm
Current rating per contact: 10Amp

Environmental conditions

Operating Voltage:	600V AC Maximum
Test Voltage:	2000V AC
Temp. Range:	-20°C to +70°C
Burden (VA):	6
Overload:	to BS3938
Frequency:	50 or 60Hz
Accuracy:	+/- 1%



Enclosure Dimensions (mm):

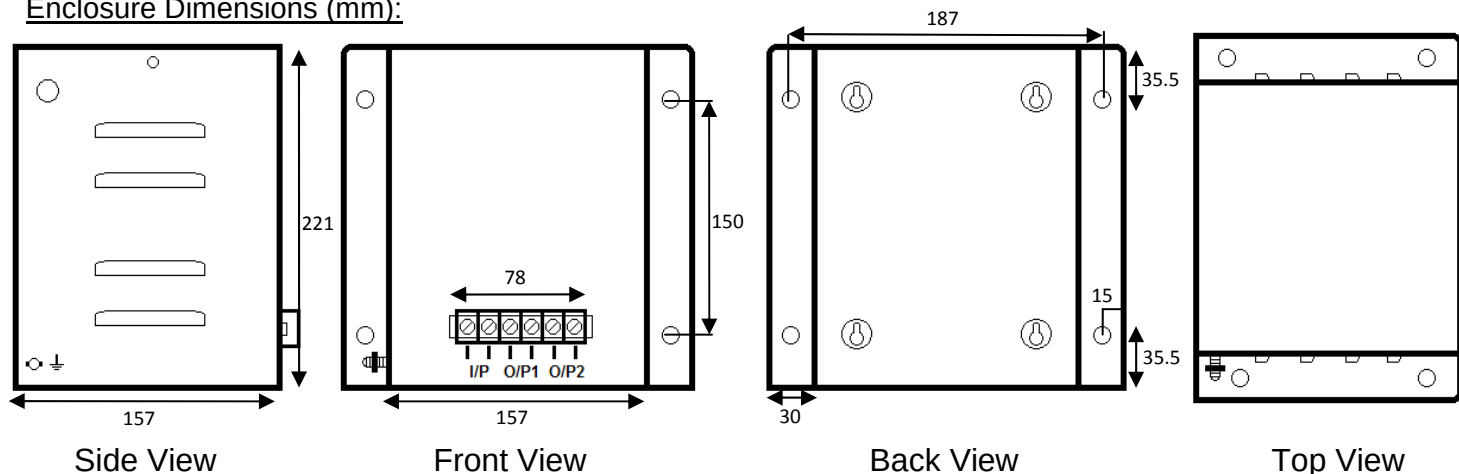

Tel: 01908-567003 Email: sales@amelec-uk.com Visit: www.amelec-uk.com Fax: 01908-566735

AMELEC Instruments, Cochran Close, Crownhill, Milton Keynes, MK8 0AJ