


AMELEC

SIGNAL CONDITIONING

ADM250X Voltage SIGNAL CONVERTER

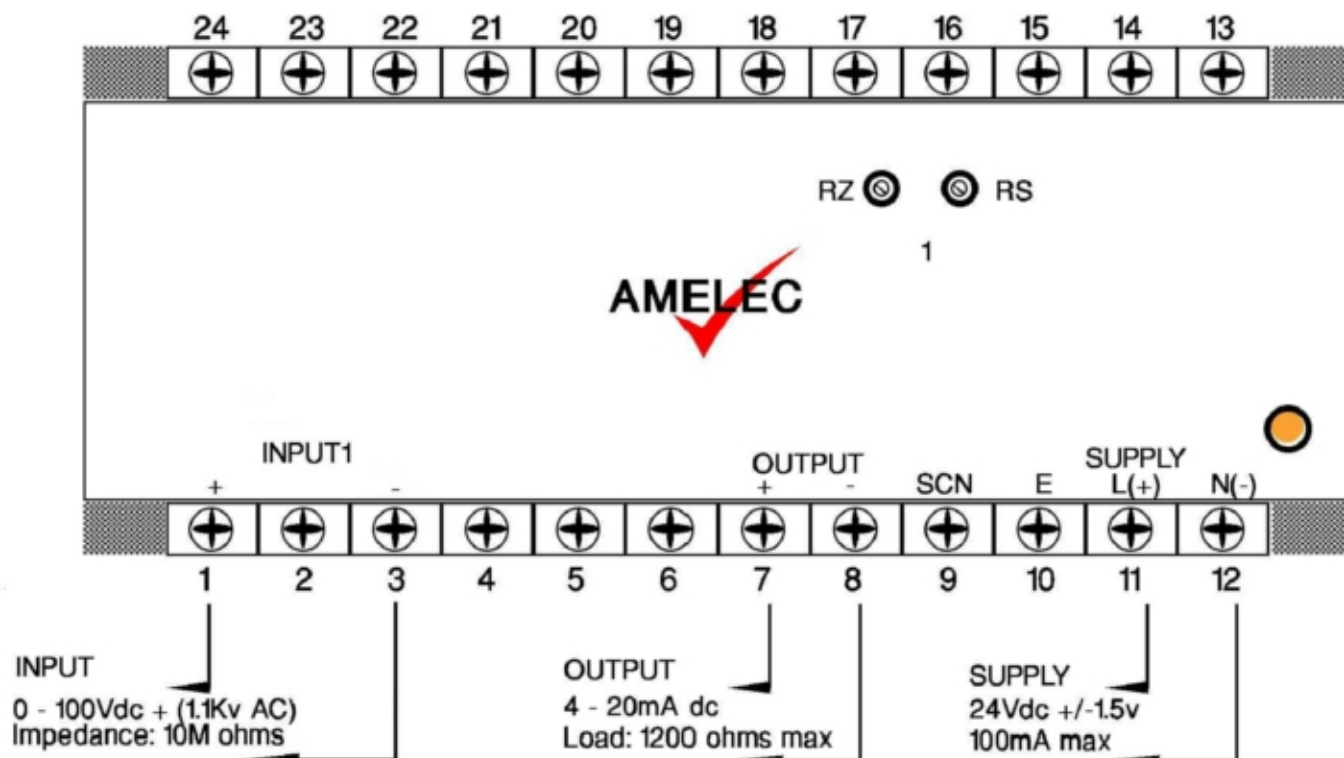

ZERO / SPAN ADJUSTMENT +/-20% OF INPUT SPAN.

DIMENSIONS: 152w X 81h X 137d (mm)

ACCURACY: < +/- 0.5%

ISOLATION (2Kv); INPUT / OUTPUT / SUPPLY / EARTH.

MOUNTING : DIN RAIL

FUNCTION: Output to represent average of input signal, with Low Limit @4mA

Attention !

The above product is based on tried and tested design techniques and meets the requirements of the relevant standards and directives.

The attention of the specifier, purchaser, installer, or the user is drawn to special measures and limitations to use, which must be observed when these products are placed into service to maintain compliance with the relevant applicable standards and directive. It is assumed that a competent person will handle the product that the standard industry practices will be applied. For further details and technical support please contact our technical sales team on telephone number shown below.

Tel: 01908-567003 E-Mail: sales@amelec-uk.com www.amelec-uk.com Fax: 01908-566735
AMELEC INSTRUMENTS, Cochran Close, Crownhill, Milton Keynes
MK8 0AJ.