

ADT132KX-P-RIS-ET7215 Process I/V Trip Amplifier

- Suitable for SIL 1, SIL 2 or SIL 3 rated (EN 61508-2) safety instrumented system (SIS) loop applications
- Supply voltage options: 115Vac $\pm 20\%$
230Vac $\pm 20\%$
24Vdc $\pm 10\%$
48Vdc $\pm 10\%$
- RFI Protection to EN 61000-4-3:2006/A2:2010
- LCD/LED Digital Display options available ('DI' option)
- 24Vdc @ 22mA two wire Input loop Excitation option available ('E' option)
- AMELEC Standard 10 year warranty

Technical Specifications

Input

Any current or voltage (DC) drive that can be terminated in a PI network to produce a 400mV span. Typical examples; 0-1mA, 0-10mA, 4-20mA, 0-5V, 0.4-2.0V, 0-10V, 0-100Vdc

Outputs

Each trip output is a pair of either N.O or N.C contacts, (TBA at time of orders), rated at 250VAC, 3A, 100VA resistive as standard

Relay Status Indicators

Red LED indicator for each Trip point; Extinguished in Energised/healthy state, ON in De-energised/Tripped state

Deadband

1% Span as std (other fixed Hysteresis bands available on request)

Controls/Test Points

Zero / Span: 15 turn potentiometers, used to set internal reference 0.1 – 2.1Vdc for 0 to 100% input range.

Trip Set Points: 15 turn potentiometers, used to set trip points anywhere over the 0 to 100% input range

Test Points: Input signal & trip set points can be monitored using the front fascia Test Points, 0.1 – 2.1Vdc over 0 to 100% input range (Test plug with 1metre flying lead supplied FOC on request)

Protection

Isolation: 500Vdc Input/Contacts/Contacts/Supply/Earth

RF Immunity: 20MHz-3GHz/5.25GHz $\leq 10\text{V/m}$,

(80MHz-1GHz/5.6GHz $\leq 30\text{V/m}$, 889MHz/1.75GHz $\leq 40\text{V/m}$)

Internal Fuse

Performance

Trip settability: $\pm 0.1\%$

Trip repeatability: $\pm 0.1\%$

Response time: $< 100\text{ms}$

Input Open Circuit response: Downscale drive as standard (O/C Upscale drive available on request)

Environmental Conditions



Storage Temperature: -40 to 70°C

Operating Ambient: -15 to 55°C

Relative Humidity: 5 – 95% RH

EMC: 2014/30/EU, EN 61326-1:2013 (Generic Industrial levels)

WIRING

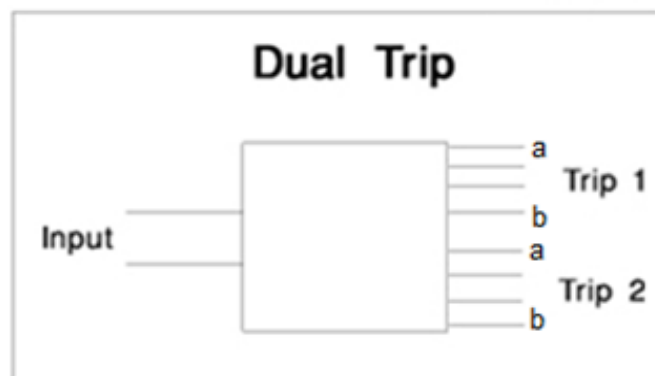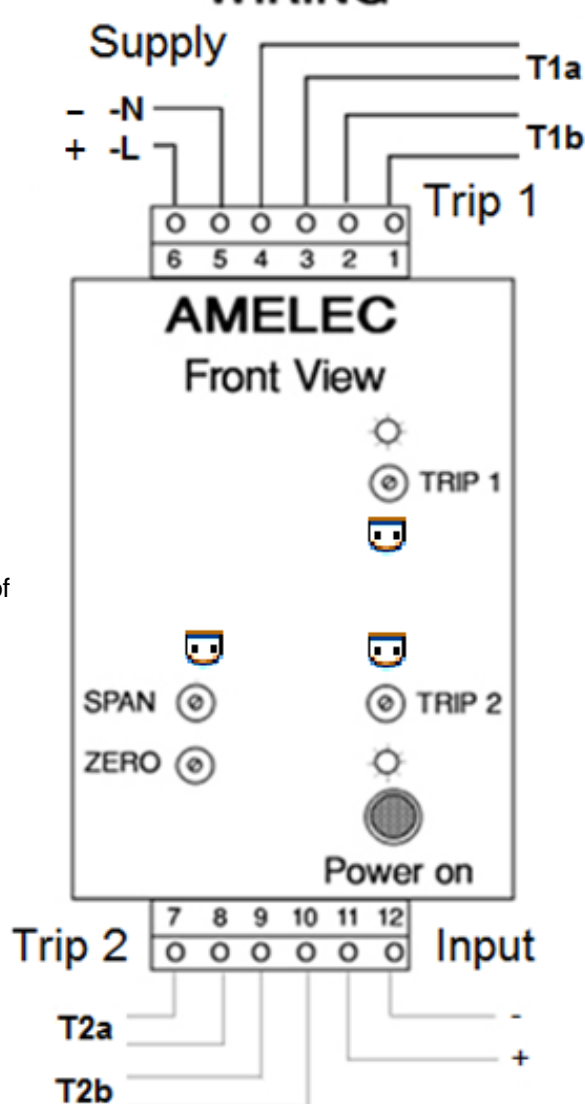

Dimensions/Mounting Options

Dimensions: 50w x 75h x 182d mm

Mounting: Din Rail (TS35) as standard.

Surface by Seismic Keyhole plate option available on request (mounting plate Dims: 50w x 130h mm)

Tel: 01908-567003 Email: sales@amelec-uk.com Visit: www.amelec-uk.com Fax: 01908-566735

AMELEC Instruments, Cochran Close, Crownhill, Milton Keynes, MK8 0AJ